


- Technical Requirements:
1. Design and manufacture according to API 609
 2. Face to face according to API 609.
 3. Flange drilling according to AS2129 TABLE E
 4. Pressure test according to API 598.

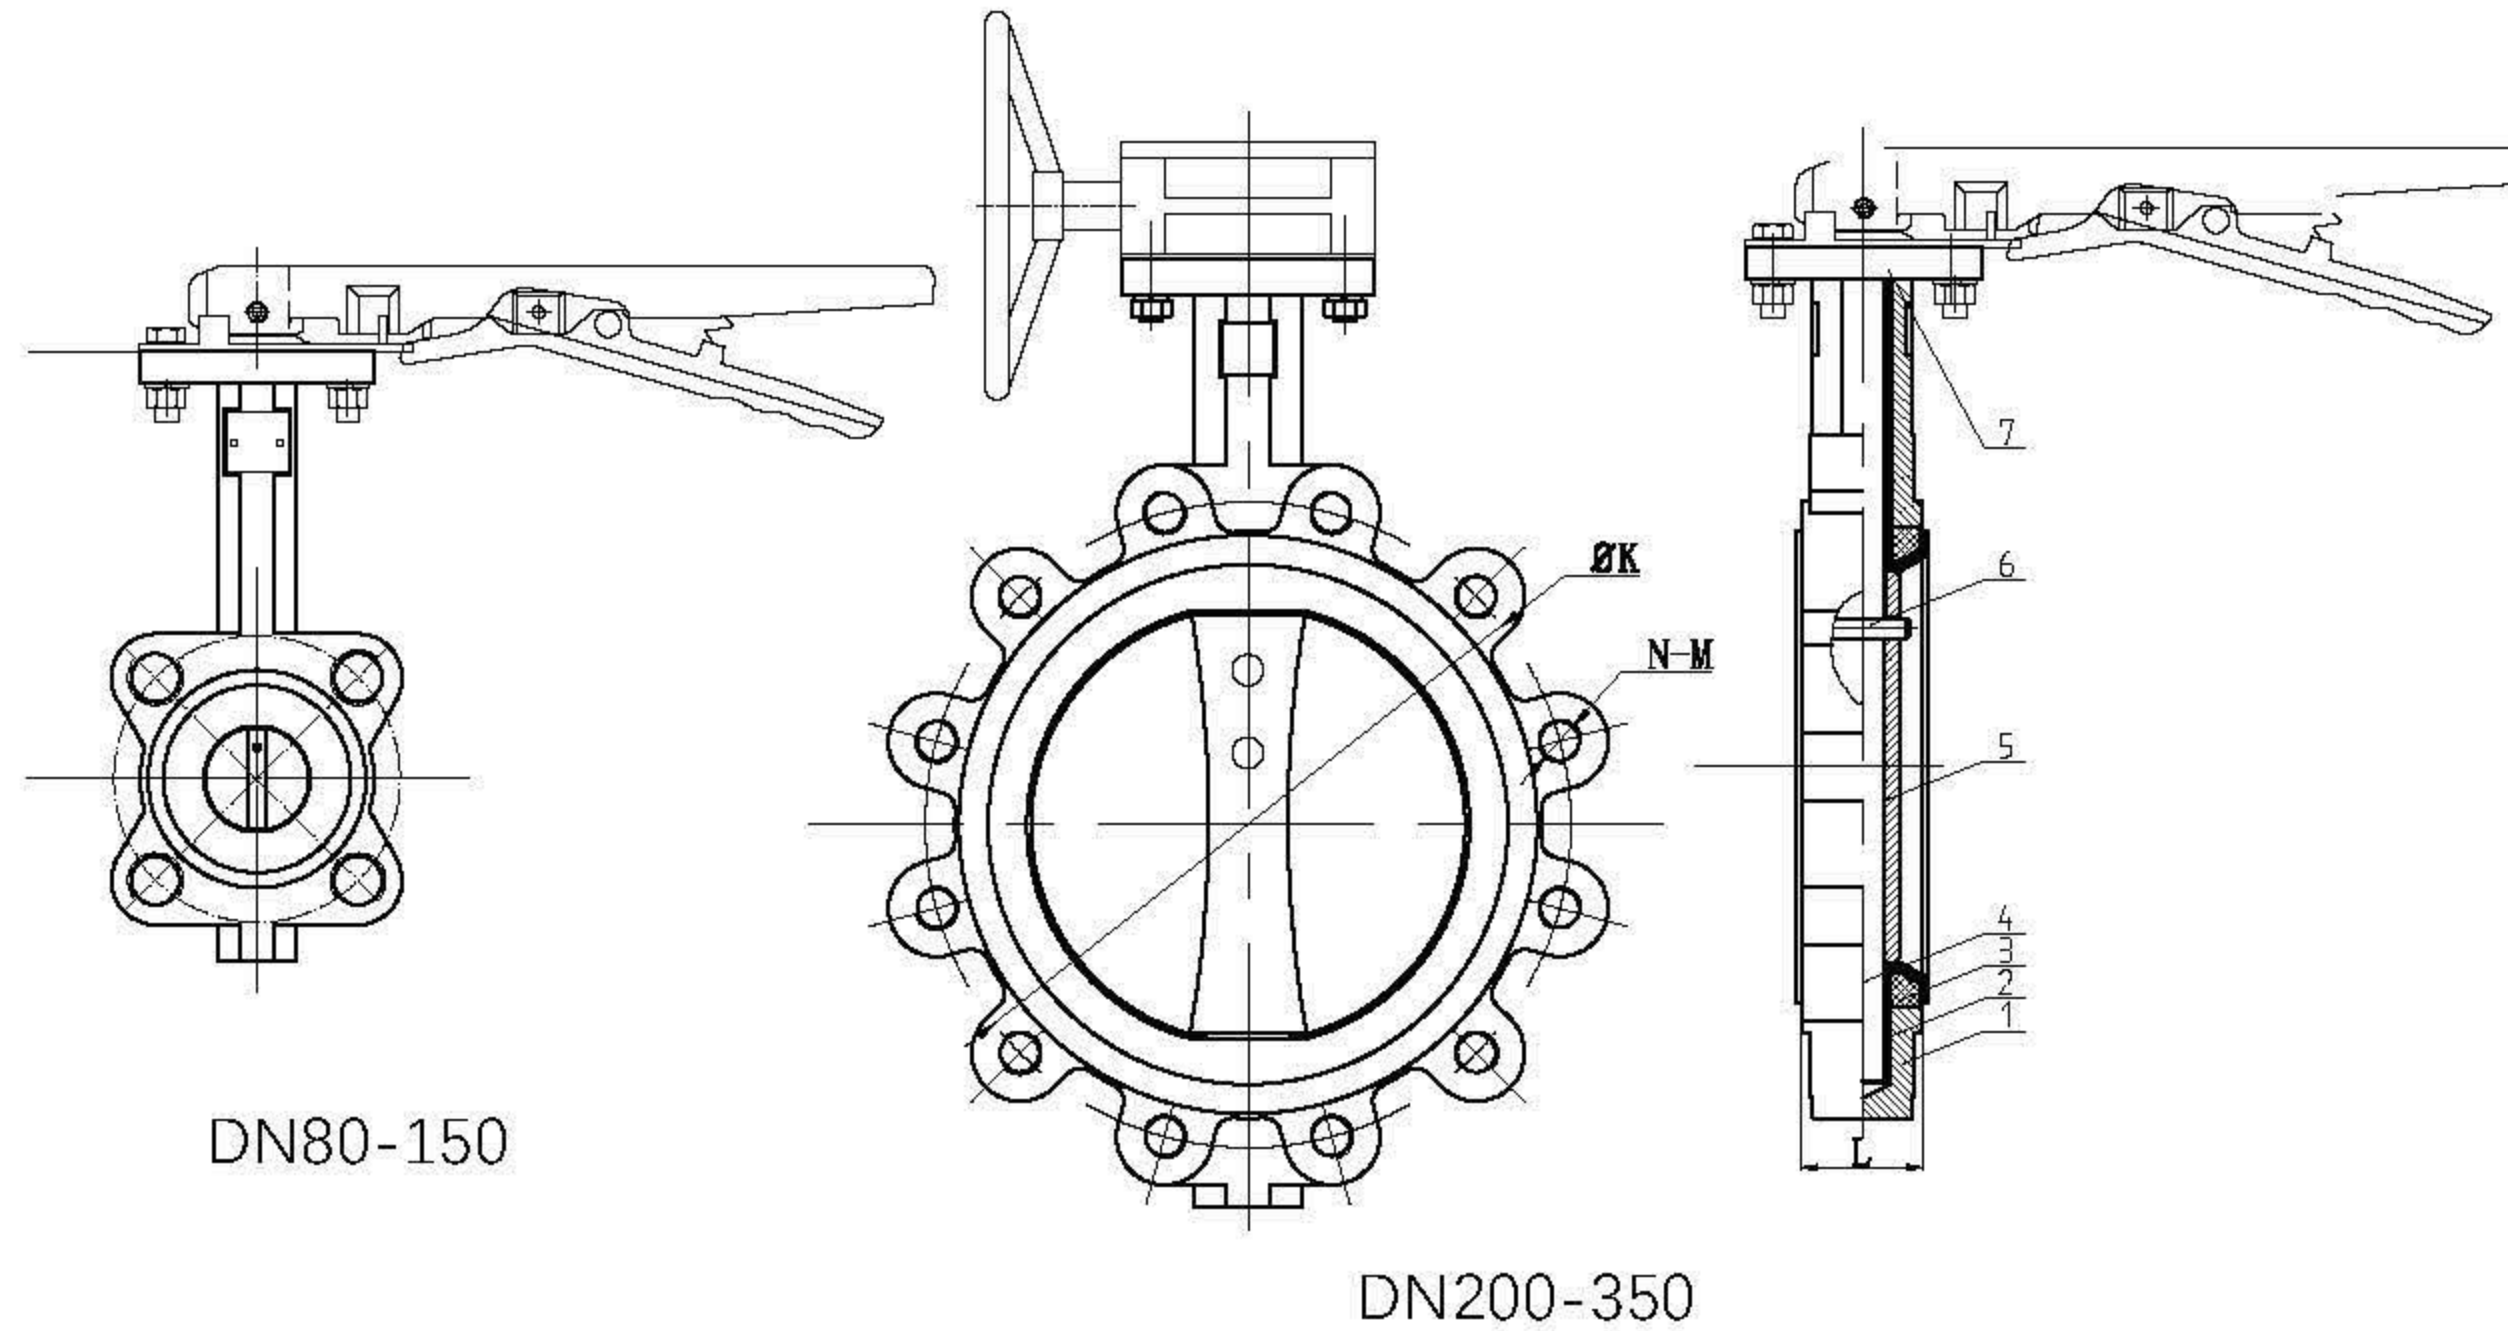

PERFORMANCE LIST			
Nominal pressure	PN16		
	SHELL	2.4	MPa
TEST	SEALING	1.8	
Temperature: -10~110 C°			
MEDIUM: Water, Air, etc.			

SIZE		A	B	C	L	TABLE E		ISO 5211			Top Flange
mm	in					ØK	N-Ød	ØD	ØD1	N-ØG	
50	2"	67	141	32	43	114.3	4-Ø18	65	50	4-Ø8	F05
65	2 1/2"	75	151	32	46	127	4-Ø18	65	50	4-Ø8	F05
80	3"	95	160	32	46	146.1	4-Ø18	65	50	4-Ø8	F05
100	4"	111	180	32	52	177.8	8-Ø18	90	70	4-Ø10	F07
125	5"	129	193	32	56	209.6	8-Ø18	90	70	4-Ø10	F07
150	6"	142	207	32	56	235	8-Ø22	90	70	4-Ø10	F07
200	8"	170	240	45	60	292.1	8-Ø22	125	102	4-Ø12	F10
250	10"	206	270	45	68	355.6	12-Ø22	125	102	4-Ø12	F10
300	12"	238	316	45	78	406.4	12-Ø26	125	102	4-Ø12	F10
350	14"	267	368	45	78	470	16-Ø26	125	469.9	12-Ø26	F10

7	Rubber cap		EPDM
6	Pin		316
5	Disc		316
4	Stem		410
3	Seat		EPDM
2	Bushing		PTFE
1	Body		DI
No.	Name	Qty	Material
			Butterfly Valve